

# 18 FOOT LIGHT ROPE

## IMPORTANT SAFETY INSTRUCTIONS

When using electrical products, basic precautions should always be followed including:

1. Electrical ratings 0.12A – 18ft RD
2. Fuse replacement rating 8A.
3. Do not cover this product as the covering may cause the flexible light to overheat, melt, or ignite.

## READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. Do not operate with the flexible light tightly coiled.
2. Do not puncture, cut, shorten, or splice the flexible lighting.
3. Do not route the cord or flexible lighting through walls, doors, windows or any like part of the building structure.
4. Do not use if there is any damage to the light or cord insulation. Inspect periodically.
5. Do not submerge flexible light in liquids, or use the product in the vicinity of standing water of other liquids.
6. Secure this flexible light using only the hangers or clips provided. Do not secure this product or its cord with staples, nails, or like means that may damage the insulation.
7. Do not subject flexible lighting to continuous flexing.
8. Do not exceed the maximum connection of 8 lights together.
9. This product has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock.
10. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician.
11. Do not use with an extension cord unless plug can be fully inserted. Do not alter or reverse the plug.

## SAVE THESE INSTRUCTIONS

Replacing the fuse:

1. Grasp plug and remove from the receptacle or other light rope. Do not unplug by pulling on cord.
2. Open fuse cover. Slide open fuse access cover on top of attachment plug towards blades.
3. Remove fuse carefully.
4. Risk of fire. Replace fuse only with 8 Amp, 125Volt fuse (provided with product).
5. Close fuse cover. Slide closed the fuse access cover on top of attachment plug.
6. Risk of fire. Do not replace attachment plug. Discard product if the attachment plug is damaged.

**WARNING: When using outdoor - use portable lighting products, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury, including the following.**


1. Ground Fault Circuit Interrupter (GFCI) protection should be provided on the circuits or outlet to be used for the outdoor use flexible lighting product. Receptacles are available having built-in GFCI protection for this measure of safety.
2. Use only outdoor extension cords, such as type SW, SOW, STW, STOW, SJW, SJOW, SJTW, or SJTOW.

**WARNING: When using outdoors - basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury, including the following.**

1. Ground Fault Circuit Interrupter (GFCI) protection should be provided on the circuits or outlet to be used for the outdoor use flexible lighting product. Receptacles should have built-in GFCI protection for this safety measure.
2. Use only outdoor extension cords, such as type SW, SOW, STW, STOW, SJW, SJOW, SJTW, or SJTOW.

## Installation instructions:

1. Disconnect power before connecting or removing rectifier connection or segment. This product is an extendable unit.
2. Female connector of power cord connects with male connector of rope light, (see Fig. A)
3. Screw the thread end cap with rope light end connector, (see Fig. B)
4. Do not connect more than the maximum amount of rope lights permitted by the packaging indication.
5. Only use the extension segment provided along with product

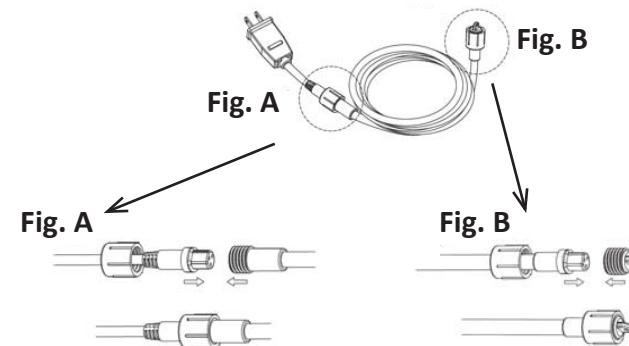

For rope light mounted with S-hook fixation:

1. Use the S-hook to hang the applicable support.
2. Fix the Rope light into the clasp.



USA

